

OX BLUE STAMPEDE

Custom built elliptical dump bodies

OX BODIES



"As Strong As An Ox"®



Rugged Reliability

- Maximize payload with a virtually self-cleaning elliptical design (26" radius sides).
- Enjoy superior quality and functionality highlighted by a smooth finished appearance.
- Thrive in heavy duty situations with all Hardox material.
- Stand up to harsh environments with corrosion-resistant continuous welds.
- Choose the heated option to keep materials flowing smoothly throughout the year.

A  **TBEI** BRAND
TRUCK BODIES & EQUIPMENT INTERNATIONAL, Inc.

www.oxbodies.com

OX BLUE STAMPEDE

Standard Features

- 10'-19' Lengths, 8-30 yard capacity
- ¼" Hardox 450 material interior
- 26" Radius sides
- Front doghouse hoist
- Full length outer skirts
- Air operated tailgate
- 2" x 8" x ¾" Longsills
- Custom wiring harness
- Cable to pump, air-shift pto controls
- 8" Board pockets
- Driver's side step(s) & grab handle(s), plus interior step(s)
- Heavy duty push bumper apron
- Federal standard 108 all LED lights
- Two year warranty
- Epoxy primer and polyurethane top coat

Basic Options

- Heated understructure, manual or temperature regulated
- Air operated hi-lift tailgate
- Electric or manual tarp
- Steerable or rigid lift axles, with wheels and tires optional
- Controls; all air, hot-shift pto or any combination
- Wood, steel or tread-brite aluminum side boards
- 24"-42" Cab shield
- Inverted trunnion hoist
- Tread-brite aluminum skirt covers
- Diamond mounted top rail
- Pintle hitches to 50 ton
- ¼" Wall 4" x 4" tubing, diamond mounted top rail



Standard tailgate. Hi-lift option shown on cover.



Elliptical style dump body.


HOIST SPECIFICATIONS

	6382C	63111C	63120TC	63130C	63150TC	63160TC	73110C	74135C	74161C
NTEA PERFORMANCE CLASS	70	80	90	100	100	100	110	100	110
NUMBER OF STAGES	3	3	3	3	3	3	3	4	4
ACTIVE STAGE SIZES (in)	5,4,3	5,4,3	5,4,3	5,4,3	5,4,3	5,4,3	6,5,4	6,5,4,3	6,5,4,3
TOTAL STROKE (in)	82	111	120	130	150	160	110	135	161
CYLINDER RATED PRESSURE (psi)	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000
STD.PUMP GPM @ 1800 RPM	29	48	48	48	48	48	48	48	48
RECOMMENDED BODY LENGTH (ft)*	10-11	12-14	12-13	15-16	15-16	17	14	15-17	17-19
APPROXIMATE WEIGHT (lbs)	250	260	270	295	290	290	335	370	405

HOIST LOAD CAPACITY IN TONS**

HOIST MODEL	NTEA CLASS	BODY LENGTH (ft)									
		10	11	12	13	14	15	16	17	18	19
6382C	70	32.3	28.5								
63111C	80			33.3	29.7	26.2					
63120TC	90			32.4	31.3						
63130C	100						24.2	23.2			
63150TC	100						31.2	29.0			
63160TC	100								28.5		
73110C	110					42.1					
74135C	100						30.5	27.9	25.5		
74161C	110								30.3	28.1	26.5

*All hoists w/doghouse reservoir.
**Capacities based on water-level load, 12" overhang, 50 degree dump angle.
Specifications subject to change.

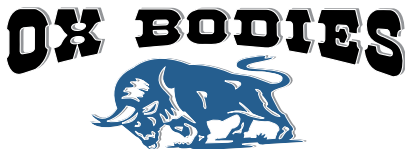

"As Strong As An Ox" ®

719 Columbus Street East • Fayette, AL 35555
Phone 205-932-5720 • 800-844-2519

Sold by: